


# ONE BASIC PRECAST MOULD SHAPE MAKES ALL

INTERNAL HOUSE WALLS  
FIRE RATING # 1 HR




BASIC FORMWORK PROFILE

INTERNAL HOUSE WALLS  
FIRE RATING # 2 HRS





SHORT SPAN INSULATED WALL & ROOF  
PANELS. FR FACE # 2 HRS. INSULATION R 1.0

INTERNAL HOUSE WALLS  
SHORT SPAN SOLID FLOOR PANELS  
FIRE RATING # 4 HRS

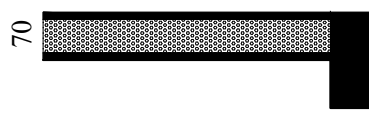


MEDIUM SPAN INSULATED FLOOR PANELS  
INSULATED EXTERNAL WALL & ROOF PANELS  
PANELS. FR FACE # 2 HRS. INSULATION R 1.7.

MEDIUM SPAN SOLID FLOOR PANELS  
SOLID RETAINING & BASEMENT WALLS  
FIRE RATING # 4 HRS

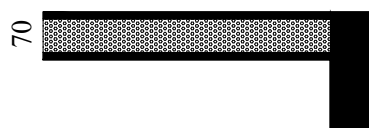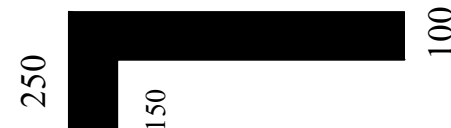


MEDIUM SPAN INSULATED FLOOR PANELS  
INSULATED EXTERNAL WALL & ROOF PANELS  
PANELS. FR FACE # 2 HRS. INSULATION R 1.7.

LONG SPAN SOLID FLOOR PANELS  
SOLID FACTORY HIGH WALLS  
SOLID RETAINING & BASEMENT WALLS  
FIRE RATING # 6 HRS

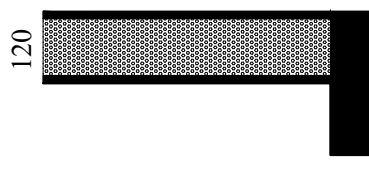

LONG SPAN INSULATED FLOOR PANELS  
LONG SPAN INSULATED ROOF PANELS  
INSULATED EXTERNAL WALL PANELS  
PANELS. FR FACE # 2 HRS. INSULATION R 2.8.

LONG SPAN SOLID FLOOR PANELS  
SOLID FACTORY HIGH WALLS  
SOLID RETAINING & BASEMENT WALLS  
FIRE RATING # 6 HRS

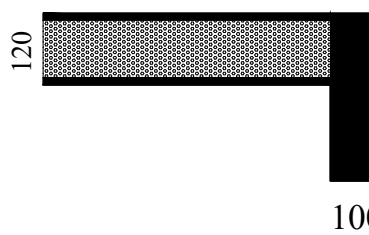

LONG SPAN INSULATED FLOOR PANELS  
LONG SPAN INSULATED ROOF PANELS  
INSULATED FACTORY HIGH WALLS  
PANELS. FR FACE # 2 HRS. INSULATION R 2.8.  
FIRE RATING OF INSITU BEAMS/COLUMNS  
4-6 HOURS.

ALL CONCRETE REINFORCED WITH STEEL FIBRES (MADE FROM RECYCLED STEEL). 40- 60 MPA.  
INSULATION FROM RECYCLED PLASTIC. ACOUSTIC INSULATION CAN BE SUBSTITUTED FOR SOUND RATINGS.

ALL SPECIFICATIONS SUBJECT TO ENGINEERING CERTIFICATION OF THE FINAL DESIGNS.

Copyright      Reg. TM  
**UNIBUILD**  
www.unibuild.com

## STRUCTURAL COMPONENT RANGE